


# INSTALLATION MANUAL

For the most current release of this manual, please visit our website at [cogan.com](http://cogan.com)


V.2018.1

Standard width:  
1'0", 1'6", 2'0", 2'6",  
3'0", 3'6" or 4'0"



Std. height:  
6'6", 7'0",  
7'6" or 8'0"

Standard depth:  
1'0", 1'6", 2'0", 2'6",  
3'0", 3'6" or 4'0"



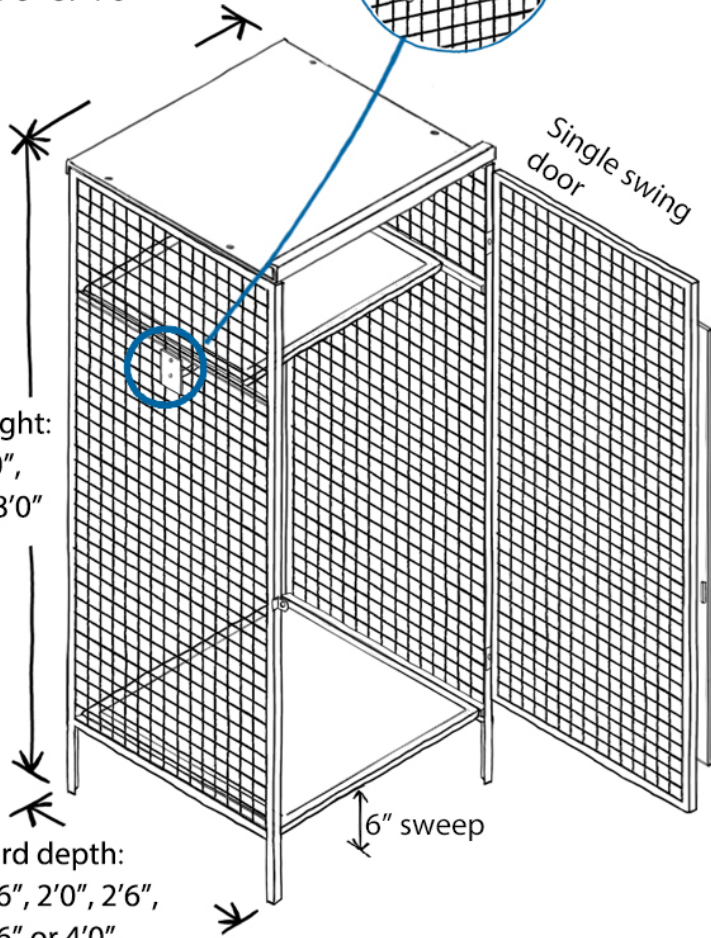


## SIDE PANEL AND DOOR MATERIAL:

Framed 2" x 2" x 10GA welded wire mesh


Framed 2" x 1" x 10GA welded wire mesh

Framed 1" x 1" x 10GA welded wire mesh



## ROOF AND BACK PANEL MATERIAL:

Unframed 2" x 2" x 6&8GA galvanized welded wire mesh with 1 1/4" x 1 1/4" x12GA transom angle




Unframed 22GA galvanized sheet metal





## TOP AND BOTTOM SHELF MATERIAL:

Framed 2" x 2" x 10GA welded wire mesh



Framed 16GA sheet metal

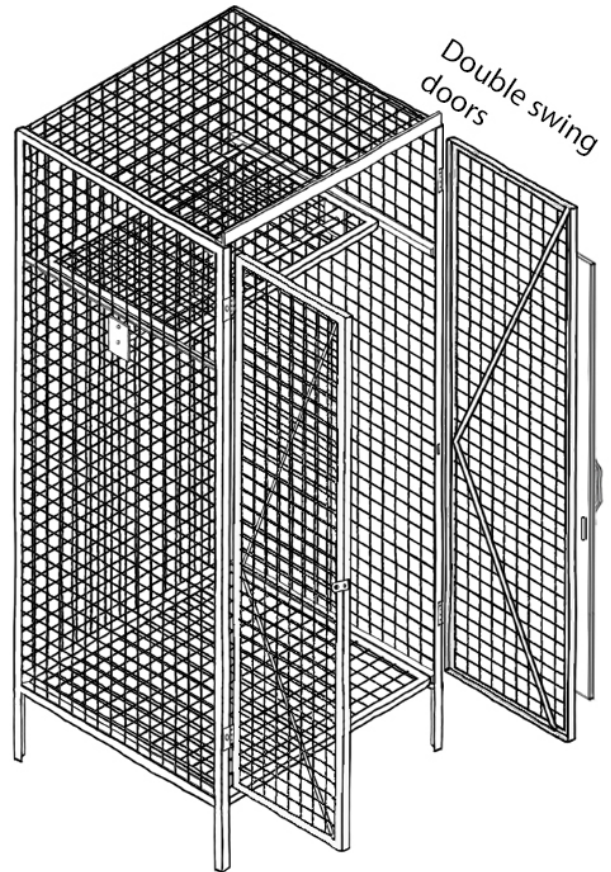

<b>Product</b>	Lockers
<b>Sub-product</b>	TA-50 Gear lockers

- Free standing locker with 6" high legs to prevent from water damage.
- All doors come equipped with a welded handle and padlock hasp.
- A coat rod with 4 hooks is available.
- Refer to your project assembly drawings for chosen material of doors, shelves, side, roof and back panels.





A Tradition of Quality Since 1901

[cogan.com](http://cogan.com)

### TIPS ON INSTALLING THE LOCKERS.

It will be more easier to work on the assembly on the ground first, then it can be lifted off the ground. To begin the process attach the roof, back panel, top shelf and the bottom shelf to the two side panels.

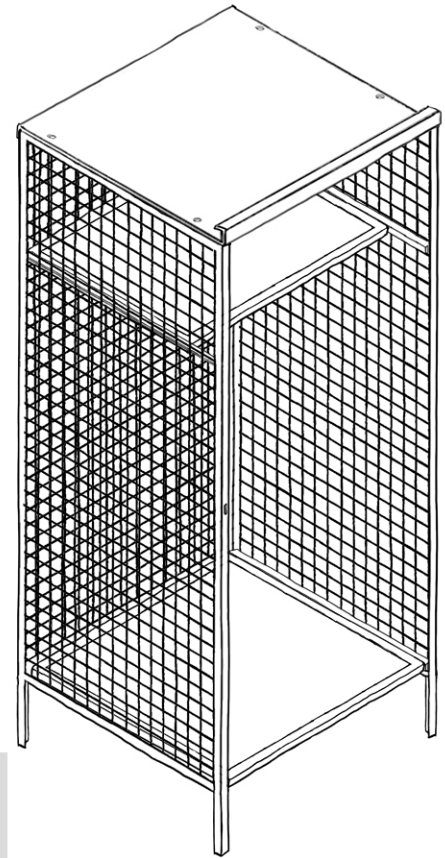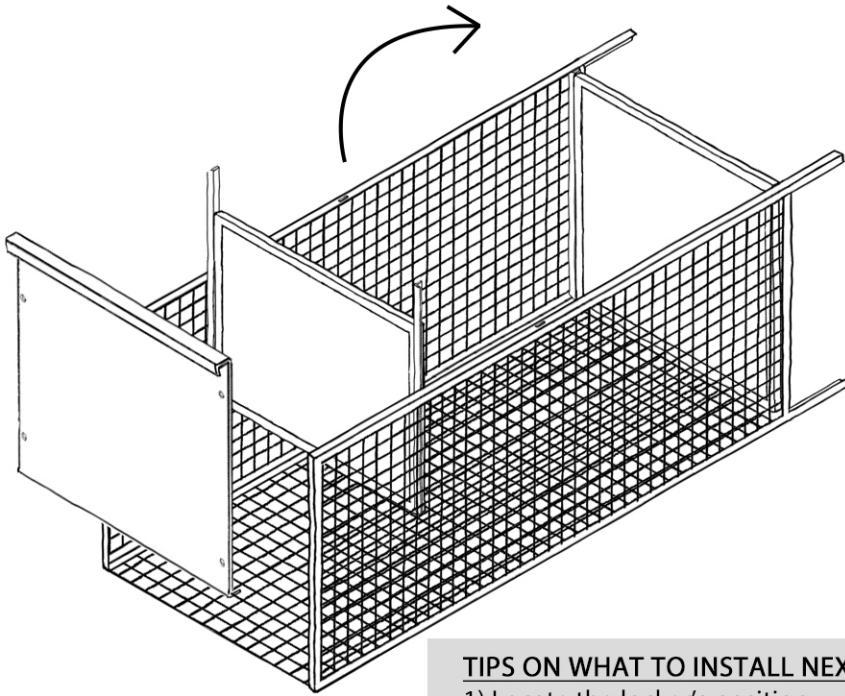

### TIPS ON WHAT TO INSTALL NEXT



- 1) Locate the locker's position
- 2) Anchor to the floor.
- 3) Install coat rod if required.
- 4) Door pad lock.



REFER TO THE NEXT PAGE FOR INSTALLING DETAILS

### For add-on lockers:

The shelf added on shelf will attach to the adjacent shelves using  $\text{Ø}1/4'' \times 3''$  carriage bolts.

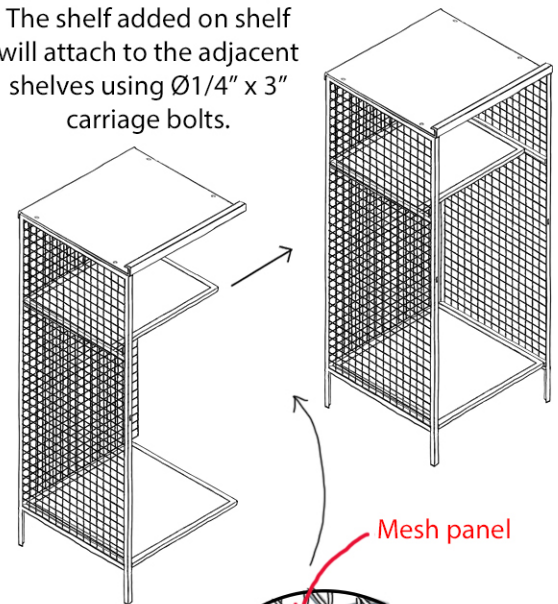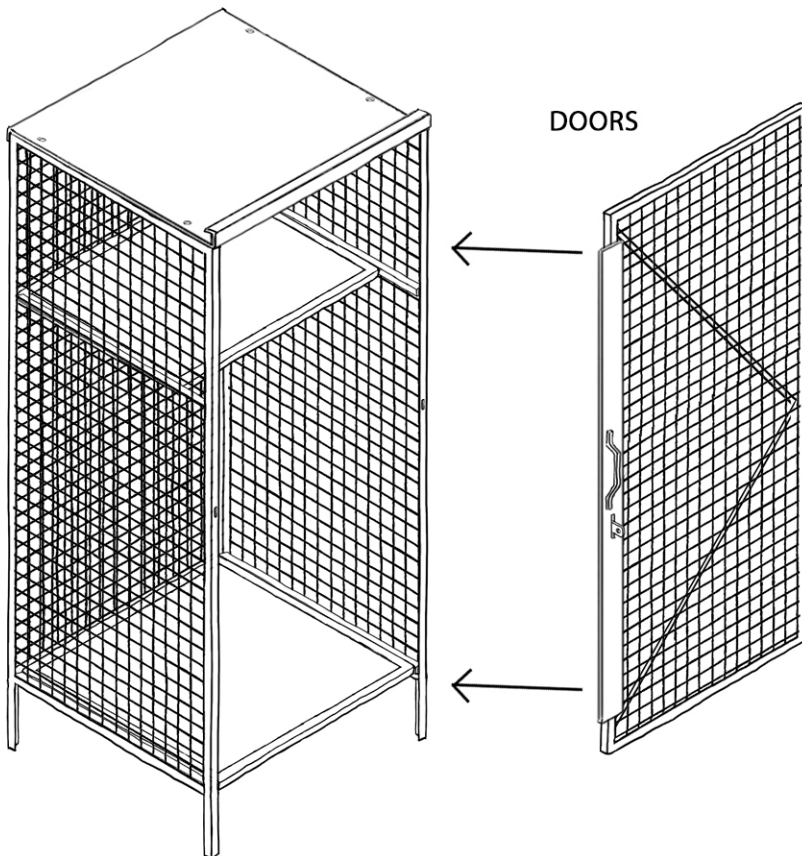


Add on shelf

Mesh panel

Add on shelves attach on the mesh side of the first locker unit.

Support angle

### Back panel


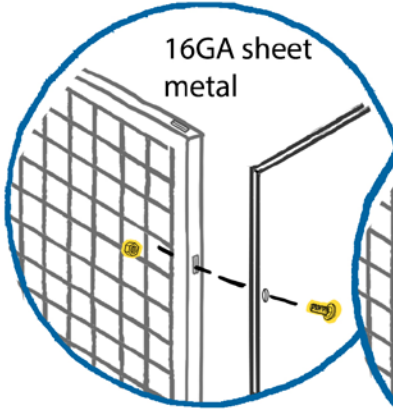


16GA sheet metal

2"x2"x6&8GA wire mesh


Depending on the situation  $\varnothing 1/4 \times 3/4$ " or  $\varnothing 1/4 \times 3$ " carriage bolt can be used

Standard fastener

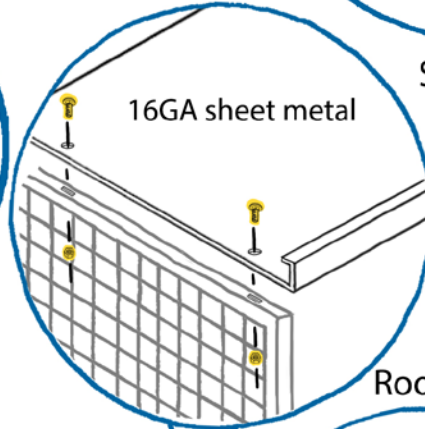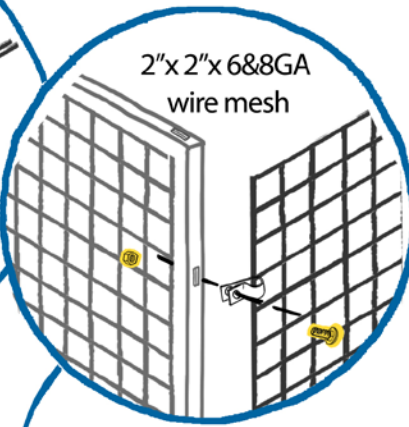

16GA sheet metal


Roof panel

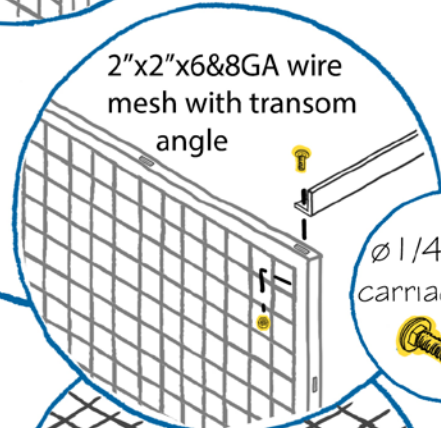


2"x2"x6&8GA wire mesh with transom angle

$\varnothing 1/4 \times 3/4$ " carriage bolt


### Coat rod and hooks

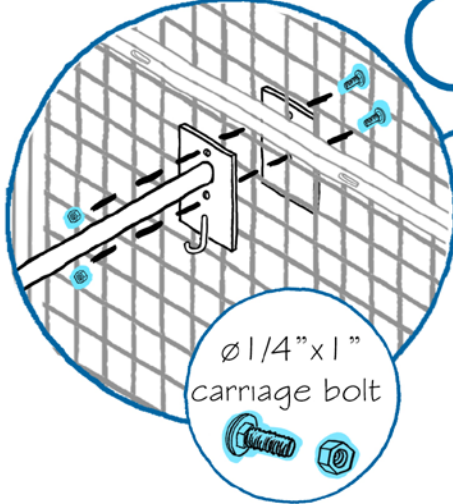


$\varnothing 1/4 \times 1$ " carriage bolt

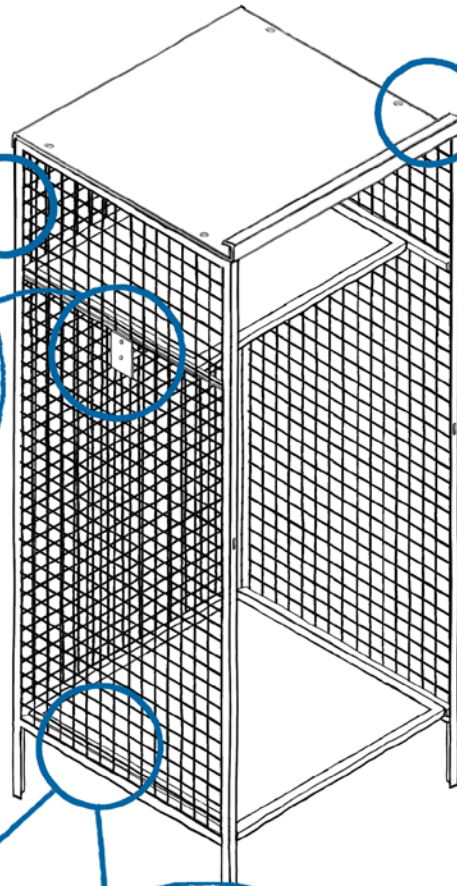


Tips: When installing the transom angle, attach them on the ground then install it onto the locker. **DO NOT TRIM** the transom angle, overlap them if too long.



### Top and bottom shelf

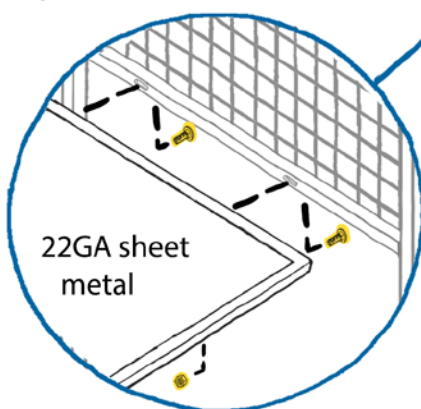


22GA sheet metal

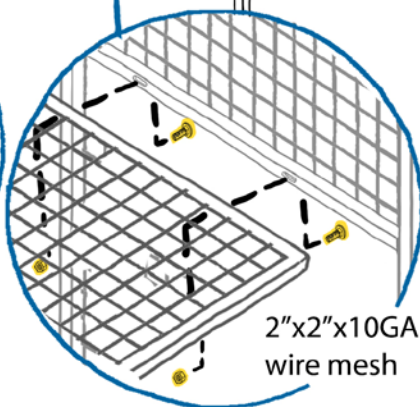


2"x2"x10GA wire mesh

\*\*\*Use mesh clips to attach the wire mesh roof panel to the side frames or to transom angle.  
Qty: Min. 8 clips per back panels and a minimum of 5 for the roof (including one on transom and 4 on the sides)




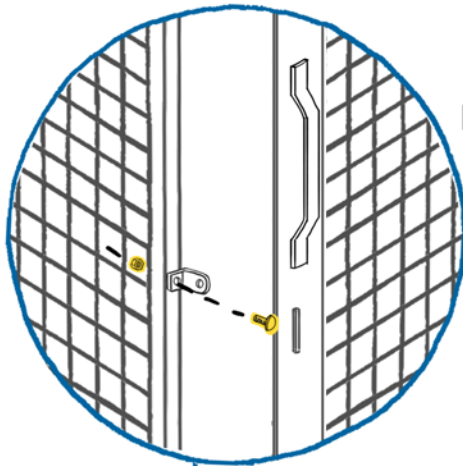


Padlock hasp

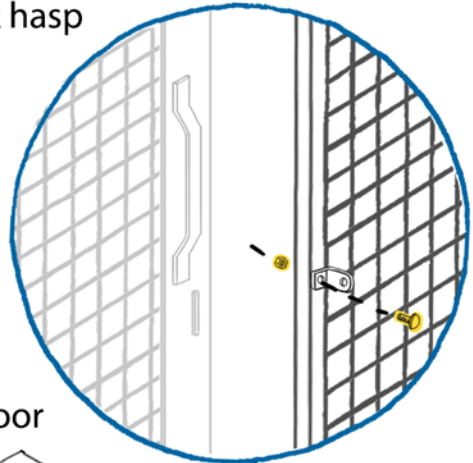



Single Swing Door

Double Swing Door

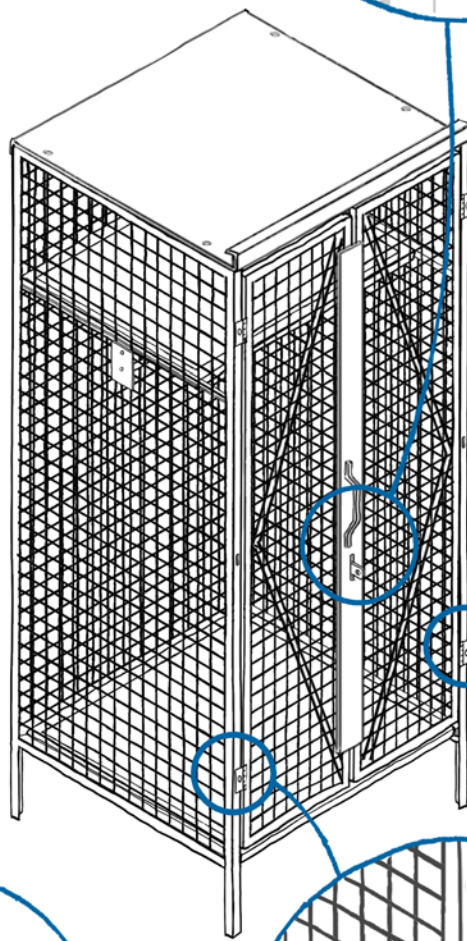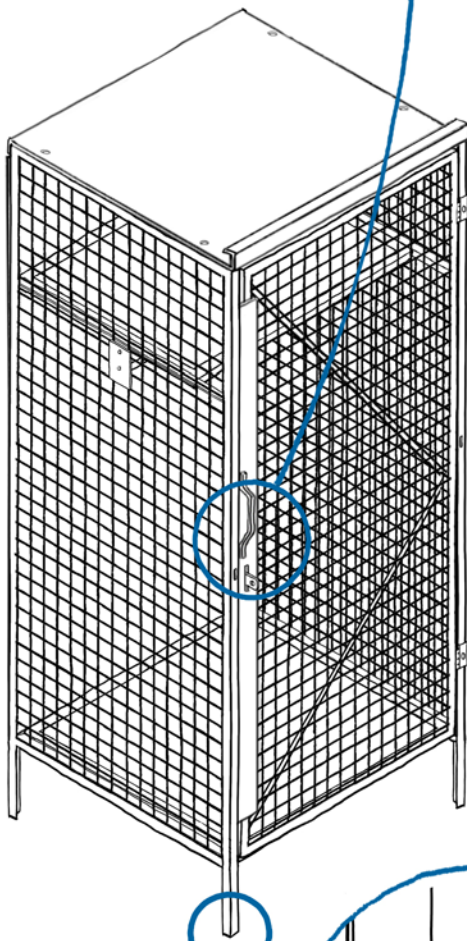


Floor adjustable anchoring bracket

Ø 1/2" x 1" carriage bolt

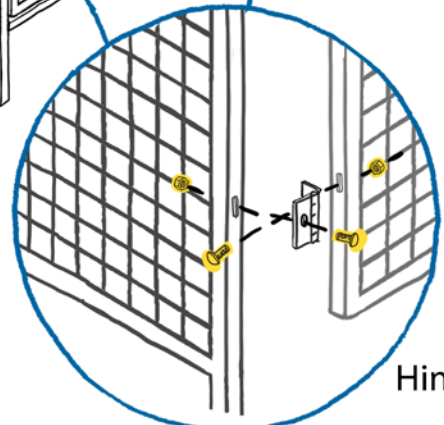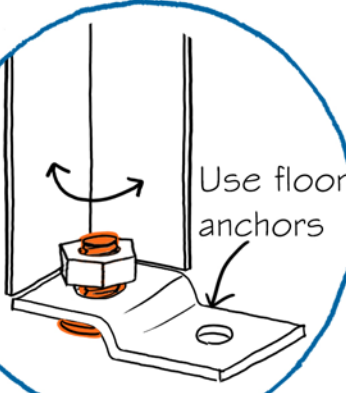

Hinges

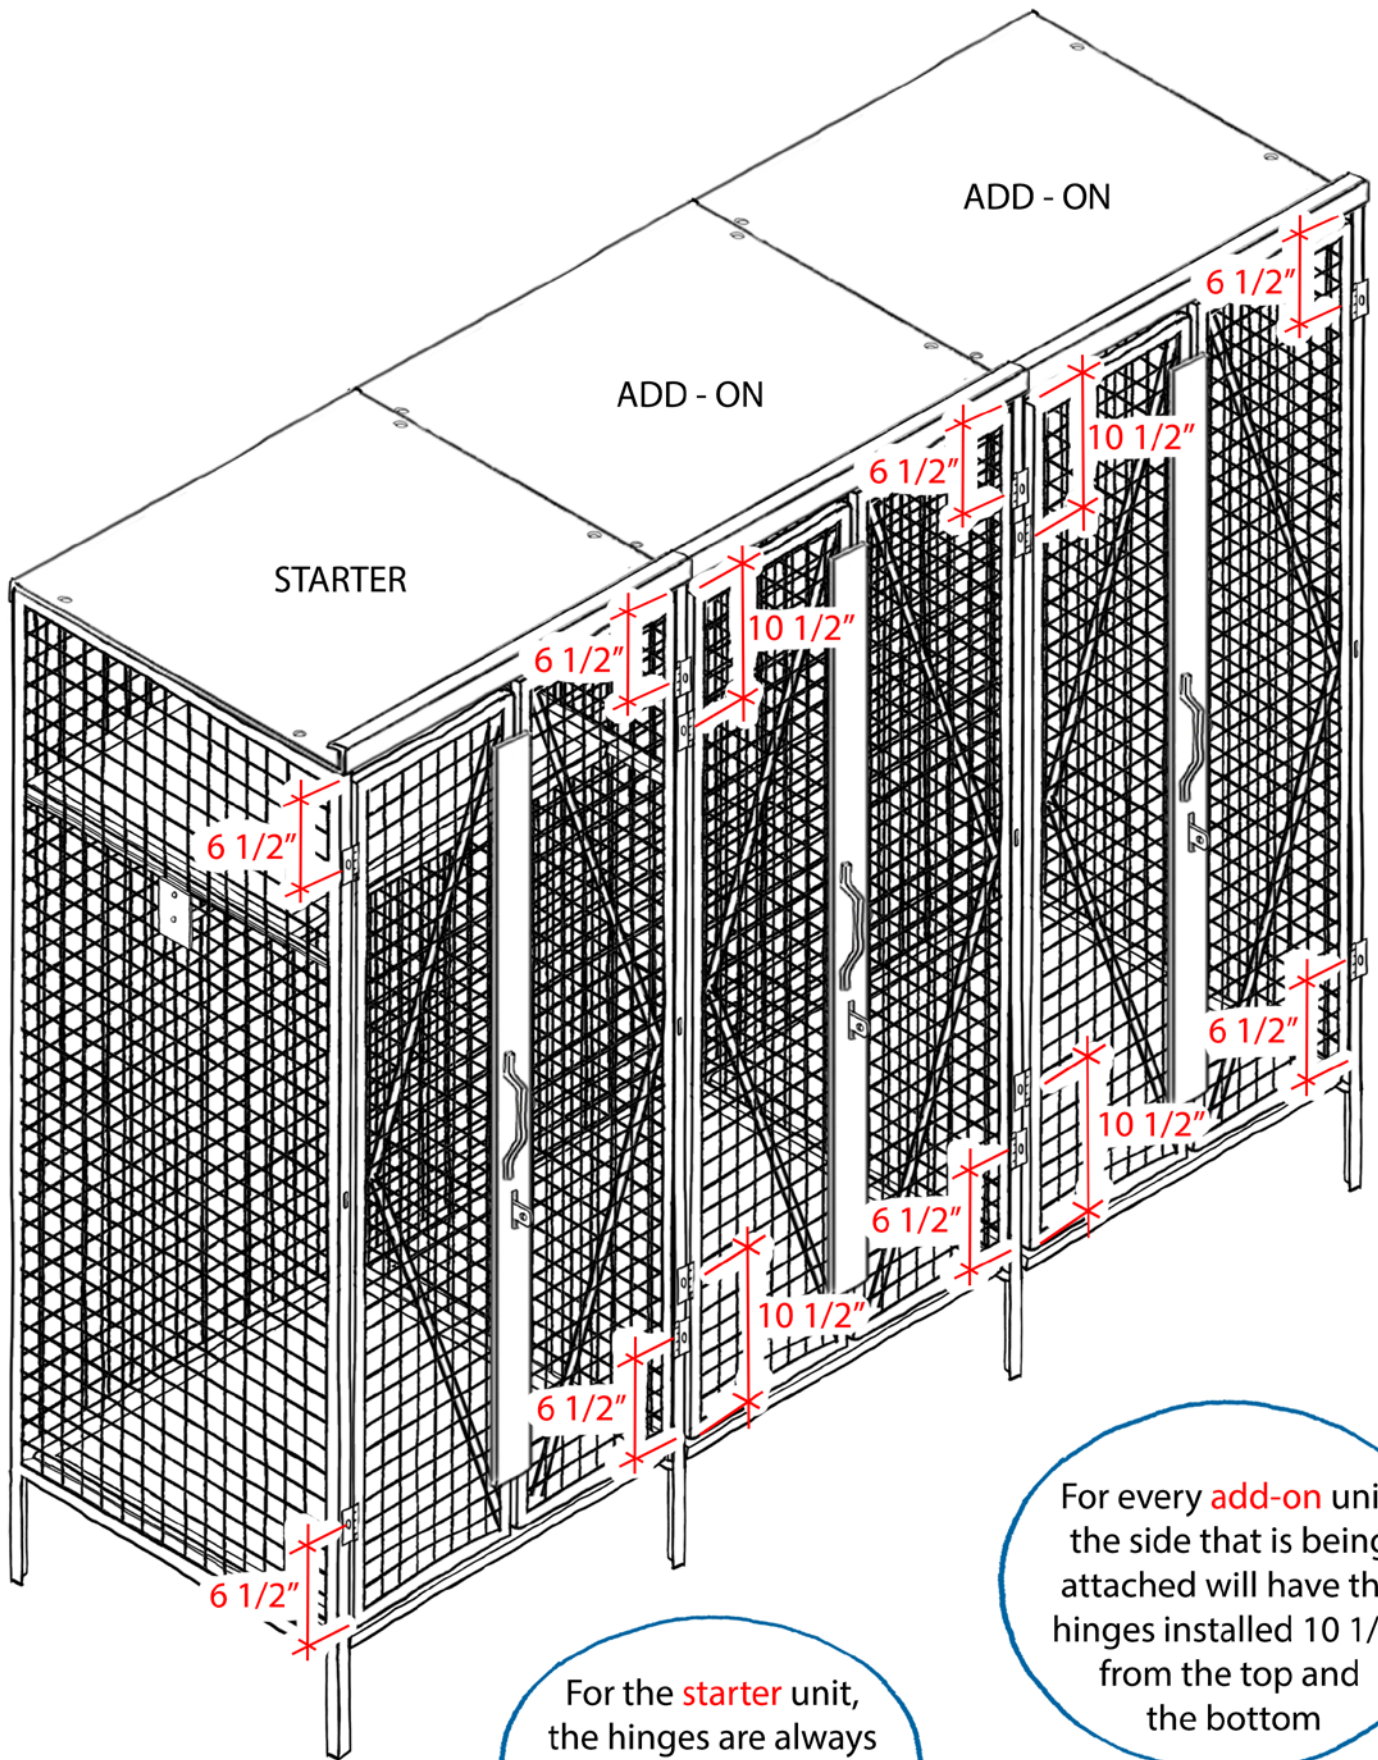

For the **starter** unit, the hinges are always installed 6 1/2" from the top and the bottom

For every **add-on** unit, the side that is being attached will have the hinges installed 10 1/2" from the top and the bottom

## **MATERIAL**

- **DOORS AND SIDE PANELS ARE MADE OF FRAMED WELDED WIRE MESH. 3 TYPES OF MESH AVAILABLE: 2" X 2" X 10GA, 2" X 1" X 10GA OR 1" X 1" X 10GA. FRAMES ARE MADE OF STRUCTURAL ANGLE 1 1/4"X1 1/4" X 12GA STRUCTURALLY SHAPED FOR EXTRA STRENGTH AND RIGIDITY. DOORS ARE REINFORCED WITH 1/2" ROUND BAR.**
- **ROOF IS MADE OF EITHER UNFRAMED 22GA SHEET METAL, OR UNFRAMED 2X2X6&8GA GALVANIZED WELDED WIRE MESH. ROOF PANEL IS NON LOAD BEARING.**
- **BACK PANEL IS MADE OF EITHER UNFRAMED 22GA SHEET METAL, OR UNFRAMED 2X2X6&8GA GALVANIZED WELDED WIRE MESH.**
- **TOP AND BOTTOM SHELVES ARE MADE OF EITHER FRAMED 2" X 2" X 10GA WELDED WIRE MESH OR FRAMED 16GA SHEET METAL. FRAMES ARE MADE OF STRUCTURAL ANGLE 1 1/4"X1 1/4" X 12GA STRUCTURALLY SHAPED FOR EXTRA STRENGTH AND RIGIDITY.**
- **SIDE PANELS, SHELVES AND DOORS HAVE A POWDER-COATED GREY TOUGH FINISH.**
- **ROOF AND BACK PANELS ARE GALVANIZED.**