




(DEA) DRUG STORAGE CAGES

cogan.com

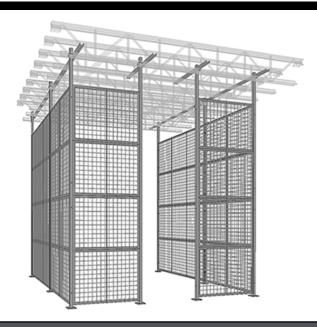

POSTS - TOP FIX

Description

This partition system features floor-to-ceiling posts up to 48' high. Standard post spacing is 2' to 10' center-to-center. Custom post spacing is also available. Ideal for maximizing storage or workspace as the partition utilizes the full height of your facility. Panels are made of 2" x 1" x 10 GA welded wire mesh framed in 1 1/4" x 1 1/4" x 12GA structural angle with one or two welded Ø 1/2" Ø reinforcement rods.

PRODUCT INFORMATION

This partition system features floor-to-ceiling posts up to 48' high. Standard post spacing is 2' to 10' center-to-center. Custom post spacing is also available. Ideal for maximizing storage or workspace as the partition utilizes the full height of your facility.

Specifications

Specifications	
Post Height	2" x 2" Posts = 3' to 20' high, with Base Plate = 6" x 6" x 1/4"
	2" x 4" Posts = 21' to 35' high, with Base Plate = 8" x 6" x 3/8"
	2" x 6" Posts = 36' to 48' high, with Base Plate = 10" x 6" x 1/2"
Material	Hollow Structural Tubing
Finish	Powder-coated



Cogan Grey






cogan.com

(DEA) DRUG STORAGE CAGES

POST DETAILS

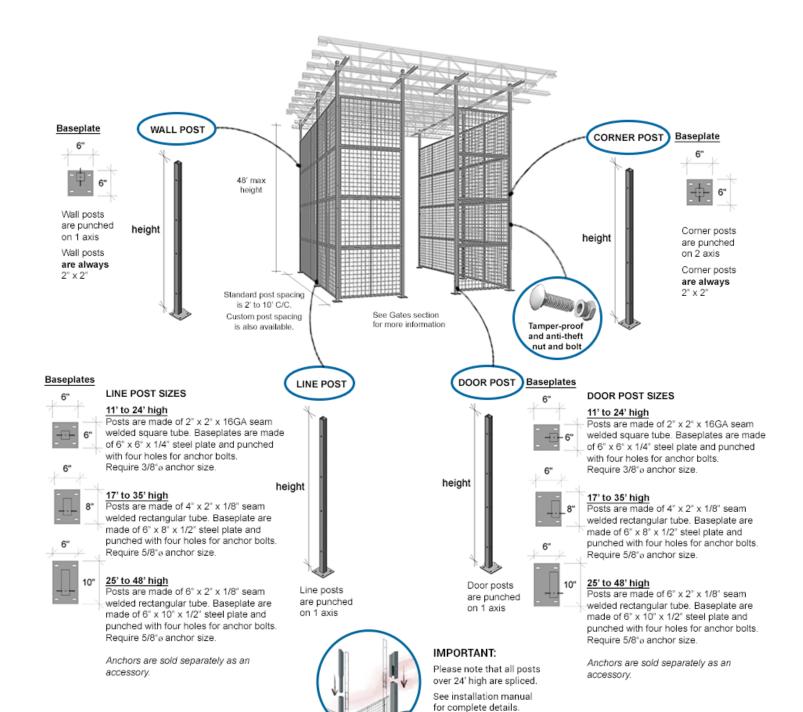







cogan.com

TOP FIX BRACING TIPS

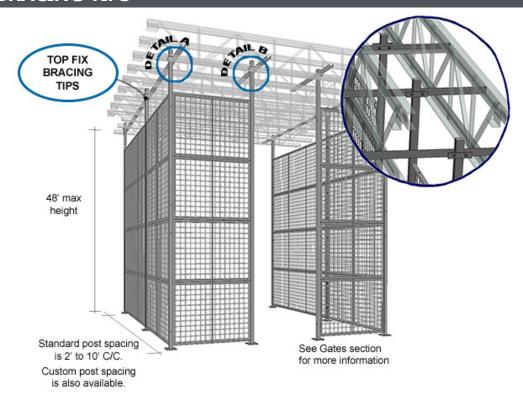

SUGGESTED INSTALLATION - PARTS IN RED ARE NOT PROVIDED BY COGAN

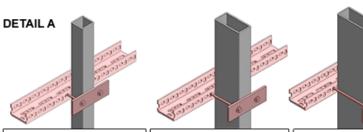

HSS: 2 x 2 PLATE: 2" x 6" x 1/4" BOLT: Carriage bolt 1/4"ø - 3" long or Treaded rod 5/16"ø - 3" long

PIPE: 1/2" STD (0.84"ø OD)

- 2 1/8" long.

HSS: 2 x 4 PLATE: 2° x 6° x 1/4" BOLT: Carriage bolt 5/16°ø


- 5" long or Treaded rod 5/16"ø - 5" long.

PIPE: 1/2" STD (0.84"ø OD) - 4 1/8" long. HSS: 2 x 6

PLATE: 2" x 6" x 1/4" BOLT: Treaded rod 5/16*ø

- 7" long.

PIPE: 1/2" STD (0.84"ø OD) - 6 1/8" long. PLAN VIEW



DETAIL B

HSS: 2 x 2 PLATE: 2° x 6" x 1/4" BOLT: Carriage bolt 1/4"ø

- 3" long. PIPE: 1/2" STD (0.84"ø OD) - 2 1/8" long. September 1

HSS: 2 x 4 PLATE: 2° x 8" x 1/4" BOLT: Carriage bolt 1/4"ø

- 3" long. PIPE: 1/2" STD (0.84"ø OD) - 2 1/8" long.



HSS: 2 x 6 PLATE: 2° x 10° x 1/4" BOLT: Carriage bolt 1/4°ø - 3° long. PIPE: 1/2° STD (0.84°ø OD)

- 2 1/8° long.