

## IMPORTANT NOTES

- The client and/or owner shall be responsible for all quantities and dimensions including the verification of, and coordination with field conditions.
- The client and/or owner shall verify all critical dimensions and conditions of existing construction that relate to this project prior to manufacturing.
- Cogan must be notified in writing of any elements found to be inconsistent or not compatible with the details indicated by these approval drawings.
- The client and/or owner shall be responsible for the building classification on all construction and warrant that all construction shall be governed by the latest edition of the state building code (including any revisions or addendas) and/or with any other applicable code or requirements of all authorities having jurisdiction.
- Verify all dimensions and details carefully.
- For installation support, please call Cogan at 1-800-567-2642.
- Press 1 (for material handling) then press 4 (installation support).
- Or press 0 to speak with an operator and ask for "installation support".

## LEAD TIMES & SHIPPING

- Dollar Limit for QuickShip orders is \$5,000
- Please allow up to 24 hours turnaround time for all QuickShip quote requests.
- Ship dates are set only after the receipt of your Official Purchase Order. Please indicate your requested ship date when submitting your Official Purchase Order.

## PRODUCT SPECIFICATIONS

- Double Tier Locker - Starter Unit
- Height: 7'6"H + 2" sweep
- Width: 4'0"W
- Depth: 5'0"D

### Side Panels:

#### Panel Fabric:

- Side panels are made of framed 2" x 2" x 10ga welded wire mesh, welded to frame at every 6".

#### Panel Frames:

- Side panel frames are made of 1 1/4" x 1 1/4" x 12ga structural steel angle with two vertical framing elements that extend 2" beyond the lower edge of the framed fabric.

- Corners are notched and seam welded.

- One adjustable anchoring bracket with 1 1/2" bolt for floor leveling is included per side panel.

### Door Panels:

#### Panel Fabric:

- Door panels are made of framed 2" x 2" x 10ga welded wire mesh, welded to frame at every 6".

#### Panel Frames:

- Door panel frames are made of 1 1/4" x 1 1/4" x 12ga structural steel angle (excluding two vertical framing elements that extend 2" beyond the lower edge of the framed fabric).

- Corners are notched and seam welded.

- Each door is reinforced with one Ø 1/2" round diagonal stay bar.

- Doors are Single Swing Type. Each door is equipped with a set of padlocking hasps, a welded handle, and door stopper.

### Dividing Shelf:

- Fixed dividing shelf is bolted to locker side panels.


- Shelf panel fabric is made of framed 2" x 2" x 10ga welded wire mesh, welded to frame at every 6".

- Shelf frames are made of 1 1/4" x 1 1/4" x 12ga structural steel angle. Corners are notched and seam welded.

- All fasteners included except floor and wall anchors.

- Cogan recommends floor anchors Ø 1/4" x 2 1/4"

- Finish: Powder-Coated Grey

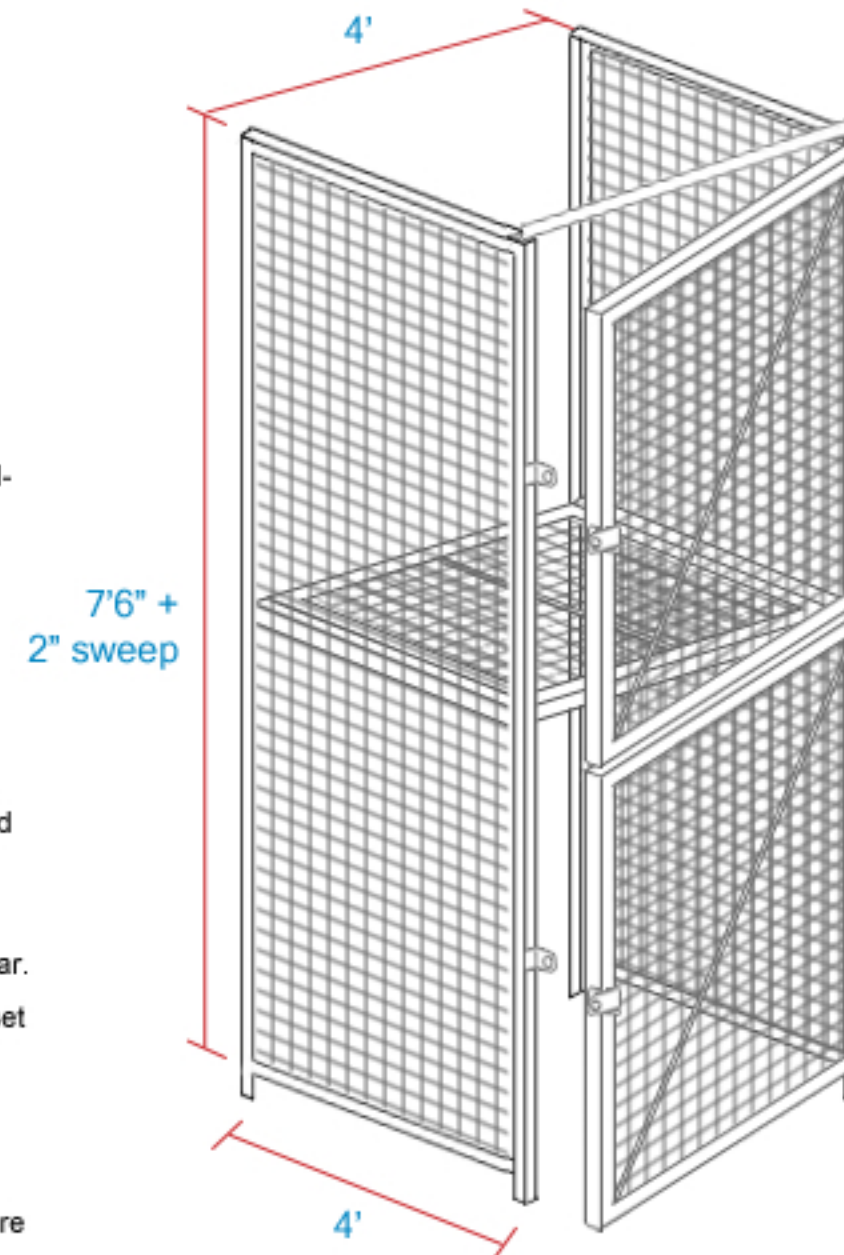

### Dividing shelf detail

