




DOUBLE SWING GATE

Description

All double swing gates are equipped with a padlock hasp, hinges and door stoppers. Gates can be installed in two different orientations (open inwards or outwards). Additional lock options are also available. Doors are made of heavy-duty 16 GA corrugated steel framed in 1 1/4" x 1 1/4" x 12 GA structural angle.

EXAMPLE:

Typical 6'W x 8'H double swing gate shown here.
Panel configuration and quantity will vary based on gate dimensions.
Assembly instructions are specific to the size and material of your gate. See Installation Manual for complete details.

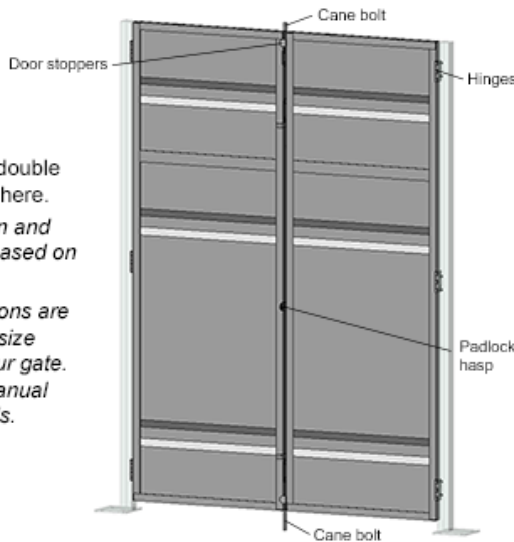

PRODUCT INFORMATION

Standard and Oversized Type #2 are assembled at Cogan. See size tab for more information.

Specifications

Door Heights	8' and 10'
Type of Door	Double Swing Gate
Door Stop	Can be hinged on the left or right, depending if the door is set to open in or out.
Finish	Powder-coated
Materials	16GA Corrugated Sheet Metal
Frame Material	Structural Angle 1 1/4" x 1 1/4" x 12GA
Type of Closure	Padlock Hasp (Optional locks available)
Stiffening profile	None

ORIENTATION OF GATE OPENING

Opening Outwards



Opening Inwards



COLORS




Cogan Grey







SIZES

Please consult the table below for a complete list of dimensions.

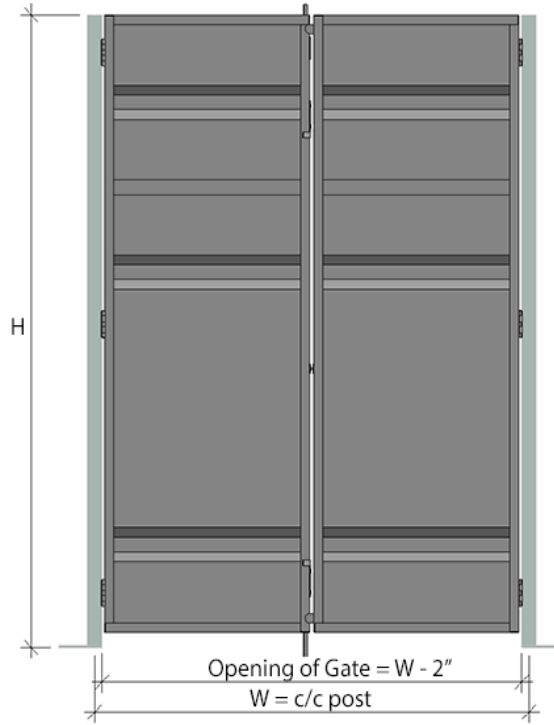

STANDARD

**OVERSIZED
TYPE# 2**

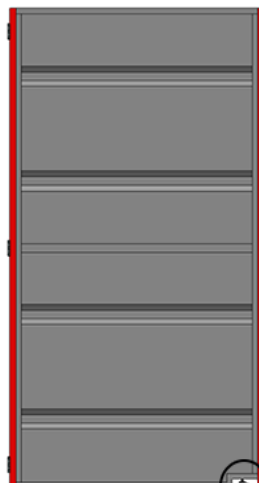

H \ W	6'-0"	8'-0"
8'-0"	✓	✓
10'-0"	✓	✓

✓ Indicates gate dimension is available.
— Indicates gate dimension is **not** available.

█ 1 1/2" x 1 1/2" HSS tube



LOCK OPTIONS

Below are the standard cylinder lock options for all of our partition security gates. Choose between a latch and key, or keys on both sides for added security.

