




**EXAMPLE:**

Typical 3'W x 7'H (+ 1' transom panel) Dutch gate shown here.

Panel configuration and quantity will vary based on gate dimensions.

Assembly instructions are specific to the size and material of your gate. See Installation Manual for complete details.

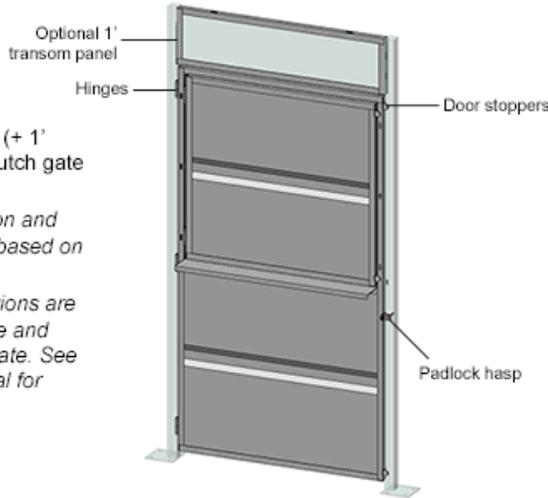

**DUTCH GATE**

**Description**

Cogan's Dutch gate is designed to act as both a swing gate and a service counter. Open the top and bottom portions for full-access or open only the top portion to create a service wicket. Installs in two orientations. Padlock hasp and hinges as well as a spring latch are included. Additional lock options are also available. The optional transom panel is made of 3/16" thick clear Lexan and the doors are made of heavy-duty 16 GA corrugated steel framed in 1 1/4" x 1 1/4" x 12 GA structural angle.

**PRODUCT INFORMATION**

**Specifications**

Door Heights	7' and 7' with 1' Transom
Type of Door	Dutch Gate
Door Stop	Can be hinged on the left or right, depending if the door is set to open in or out.
Finish	Powder-coated
Materials	16GA Corrugated Sheet Metal and Lexan
Frame Material	Structural Angle 1 1/4" x 1 1/4" x 12GA
Type of Closure	Padlock Hasp (Optional locks available)
Stiffening profile	None




3/16" thick clear Lexan  
Lexan panels cannot be painted.




ORIENTATION OF GATE OPENING

Hinged at Left

Hinged at Right

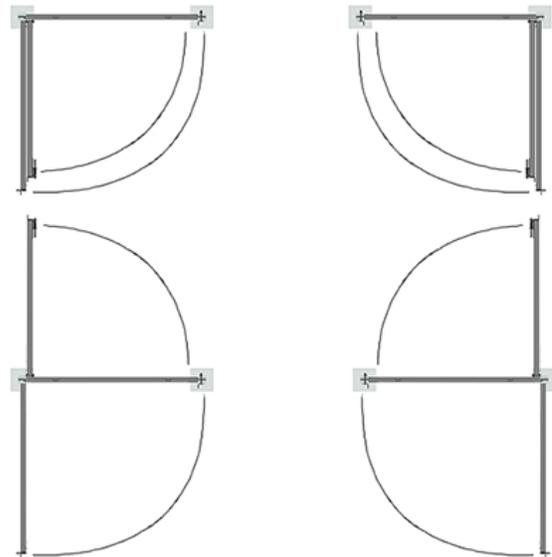


Shelf Options

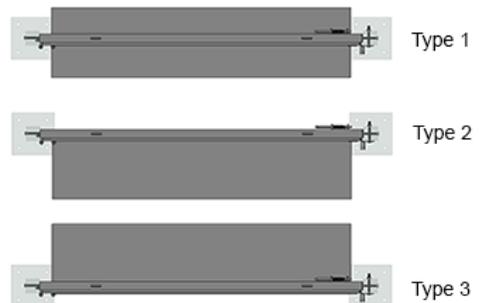



## SIZES

Please consult the table below for a complete list of dimensions.

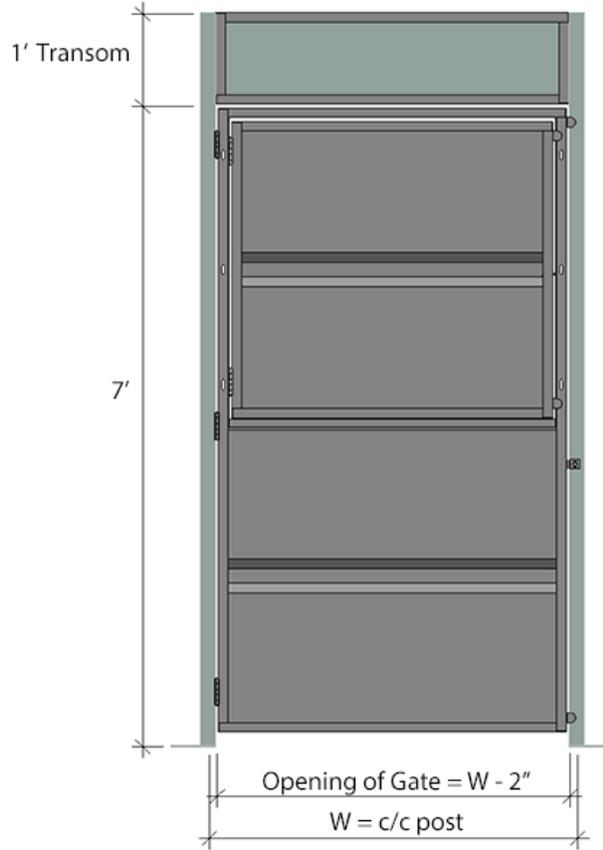

H \ W	3'-0"	4'-0"
7'-0"	✓	✓
7'-0" + 1' transom	✓	✓

✓ Indicates gate dimension is available.

— Indicates gate dimension is **not** available.



## LOCK OPTIONS

Below are the standard cylinder lock options for all of our partition security gates. Choose between a latch and key, or keys on both sides for added security.

