




SERVICE WICKET GATE

EXAMPLE:

Typical 3'W x 7'H (+ 1' transom panel) service wicket shown here.

Panel configuration and quantity will vary based on gate dimensions.

Assembly instructions are specific to the size and material of your gate. See Installation Manual for complete details.

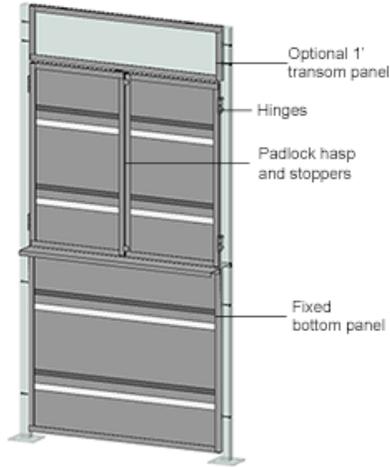

Description

Cogan's service wicket gate acts as a service counter. The top portion of the door swings open, while the bottom portion remains fixed to restrict free access to the partition. All service wicket gates are equipped with a padlock hasp, hinges and door stoppers. Additional lock options are also available. The optional transom panel is made of 3/16" thick clear Lexan and the doors are made of heavy-duty 16 GA corrugated steel framed in 1 1/4" x 1 1/4" x 12 GA structural angle.

PRODUCT INFORMATION

Specifications

Door Heights	7' and 7' with 1' Transom
Type of Door	Service Wicket Gate
Door Stop	Installed on the door with the spring lock
Finish	Powder-coated
Materials	16GA Corrugated Sheet Metal and Lexan
Frame Material	Structural Angle 1 1/4" x 1 1/4" x 12GA
Type of Closure	Padlock Hasp, Spring Lock
Stiffening profile	None




3/16" thick clear Lexan
Lexan panels cannot be painted.




ORIENTATION OF GATE OPENING

Opened Outward

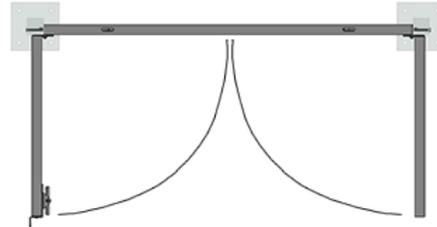

Opened Inward

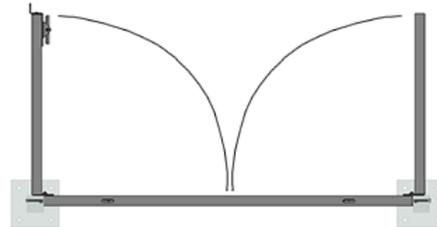

Shelf Options



Type 1



Type 2




Type 3



SIZES

Please consult the table below for a complete list of dimensions.

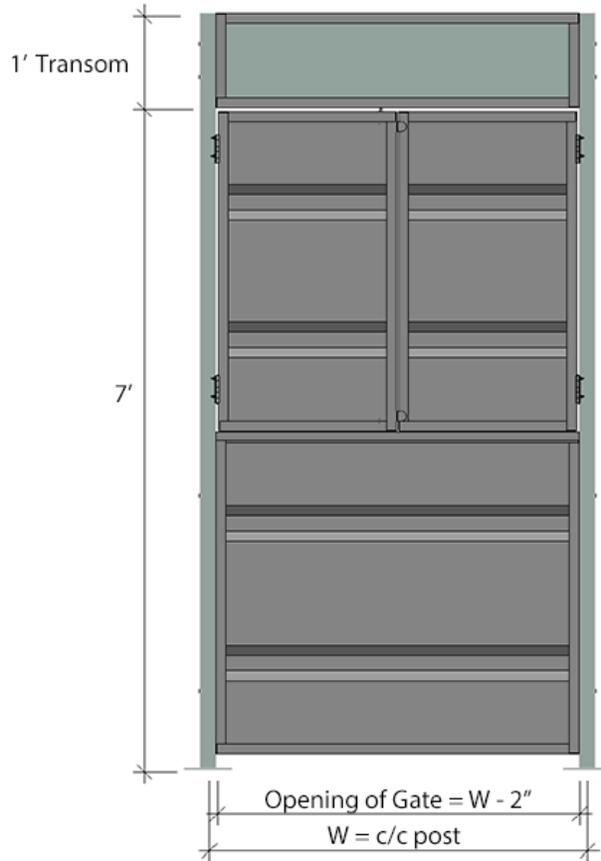

H \ W	3'-0"	4'-0"	5'-0"
7'-0"	✓	✓	✓
7'-0" + 1' transom	✓	✓	✓

✓ Indicates gate dimension is available.

— Indicates gate dimension is **not** available.